


CPL | Cast-in-Place Loop

SC0206CPL - SC0335CPL | #2 and #3 cable, 6, 12, 20 and 35 ft.

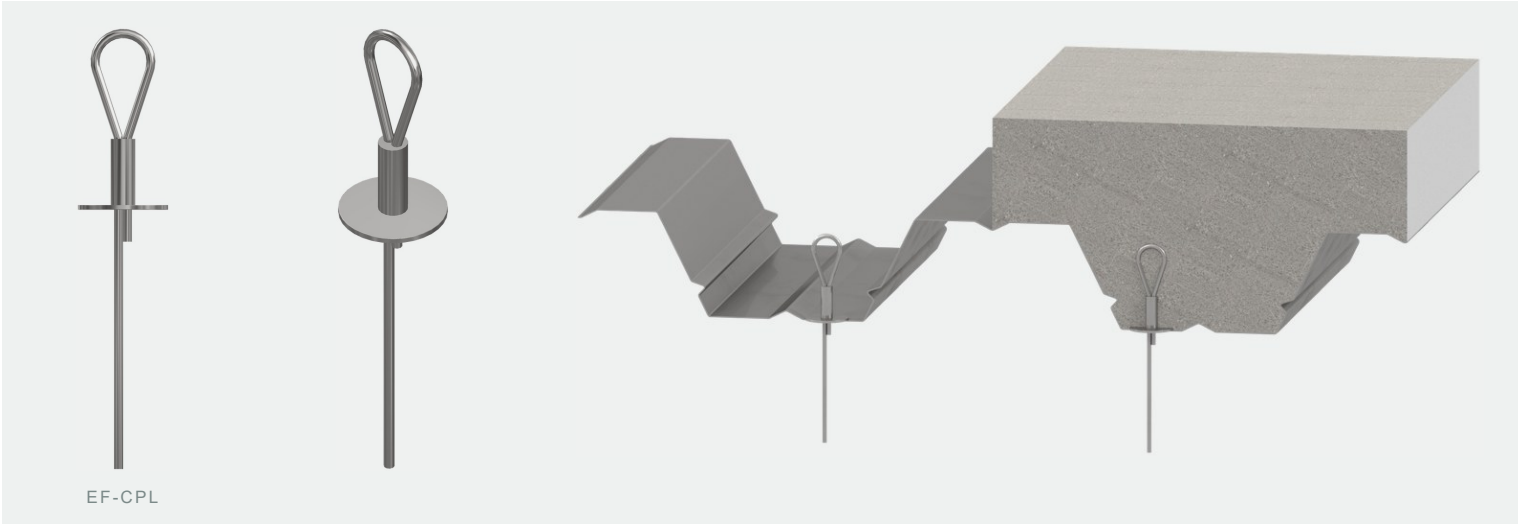

01 ALLOWABLE TENSION LOAD

CABLE	CAPACITY
#2 3/32 in.	175 lbs
#3 1/8 in.	320 lbs

02 NOTES

- STANDARD CABLE LENGTHS: 6', 12', 20', AND 35'. CUSTOM LENGTHS AVAILABLE UPON REQUEST.
- CONNECTION TO STRUCTURE MUST BE REVIEWED BY THE STRUCTURAL ENGINEER OF RECORD.
- CABLE MANUFACTURED IN ACCORDANCE WITH ASTM A1023 AND ASTM A931.
- CAST INTO THE POUR. NO POST-INSTALLED ANCHOR REQUIRED.
- VERIFIED FOR COMPLIANCE WITH THE FOLLOWING STANDARDS BY ICC-ES: ICC-ES PMG LC 1041, MSS SP-58-2025, MSS SP-163-2025, UL 2239, ASME B31.9-2025, IAPMO PS 95-2018E3, AND SMACNA HVAC DUCT CONSTRUCTION STANDARDS.