


DS23 | Goalpost Duct Support

#2 and #3 cable | 200 per box

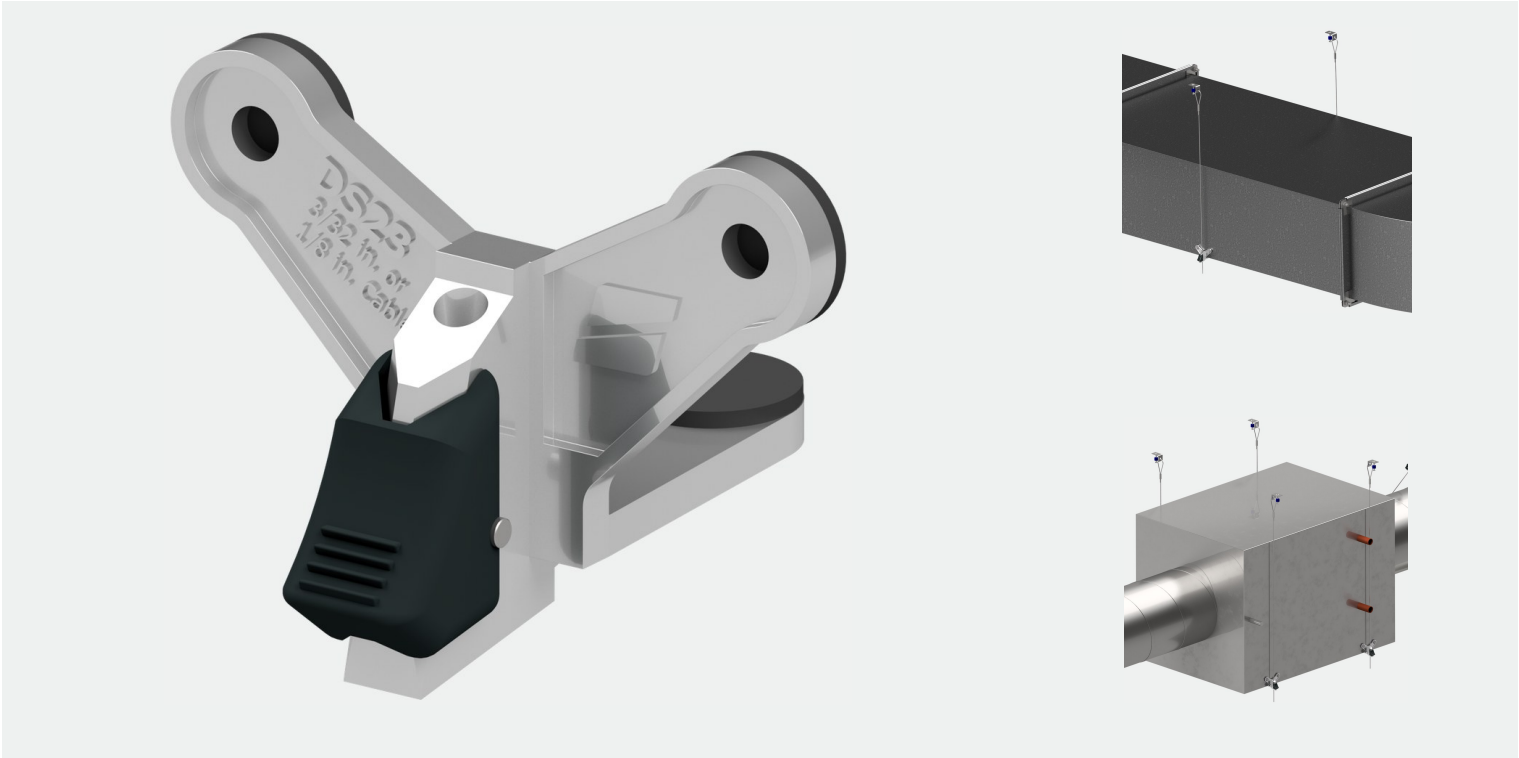

01 ALLOWABLE TENSION LOAD

CABLE	CAPACITY	ATTACHMENT
#2 3/32 in.	150 lbs	See EF (End Fixing) Details for capacities of cables and attachment to structure
#3 1/8 in.	250 lbs	See EF (End Fixing) Details for capacities of cables and attachment to structure

02 ANGLED LOAD RATINGS

CABLE	0 deg.	15 deg.	30 deg.	45 deg.	60 deg.
#2 3/32 in.	150	140	125	105	75
#3 1/8 in.	250	240	215	175	125

03 NOTES

- CABLE-MOUNTED SUPPORT DEVICE ENGINEERED FOR HVAC DUCTWORK AND EQUIPMENT. PROVIDES THE SAFEST AND FASTEST METHOD OF DUCT SUPPORT IN ITS CLASS.
- CONNECTION TO STRUCTURE MUST BE REVIEWED BY THE STRUCTURAL ENGINEER OF RECORD.

■ COMPATIBLE WITH BOTH #2 AND #3 SIMPLE CABLES.

■ QUICK-SET MECHANISM ALLOWS IMMEDIATE LOAD TRANSFER AND ON-THE-FLY ADJUSTMENT.

■ RATED LOADS ARE FOR THE SUPPORT ASSEMBLY ONLY. THE ATTACHMENT TO STRUCTURE IS EVALUATED SEPARATELY PER ICC-ES PMG-1840.

■ VERIFIED FOR COMPLIANCE WITH THE FOLLOWING STANDARDS BY ICC-ES: ICC-ES PMG LC 1041, MSS SP-58-2025, MSS SP-163-2025, UL 2239, ASME B31.9-2025, IAPMO PS 95-2018E3, AND SMACNA HVAC DUCT CONSTRUCTION STANDARDS.