


L | Swaged Loop

SC0206L - SC0435L | #2, #3 and #4 cable, 6, 12, 20 and 35 ft.

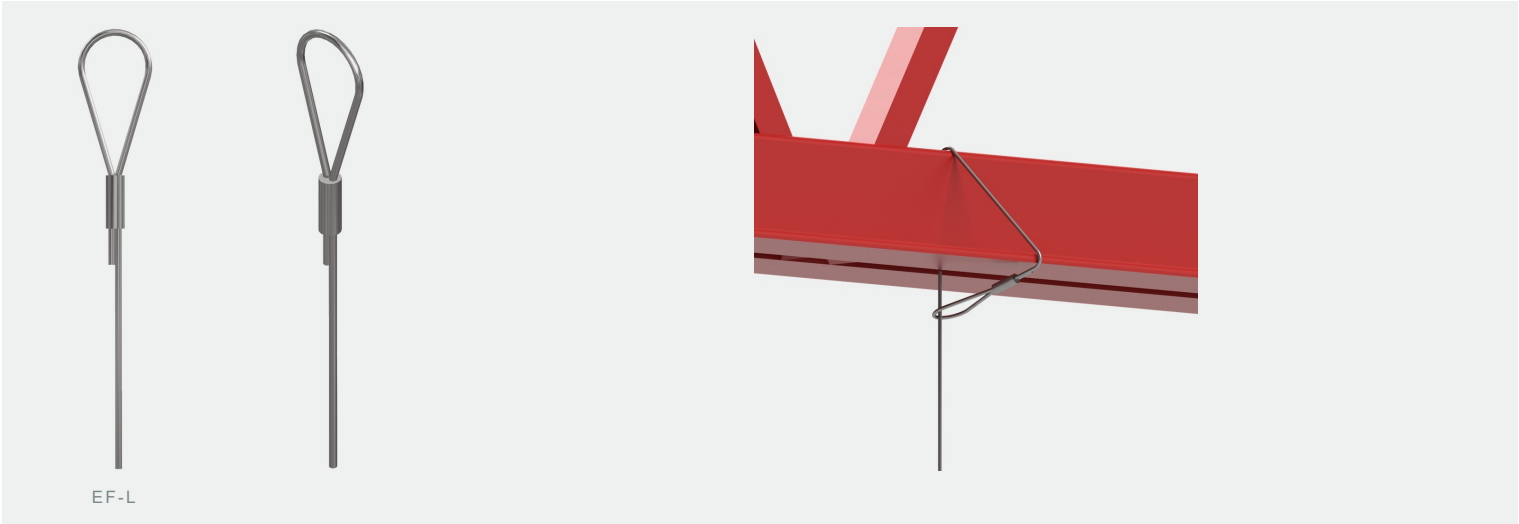

01 ALLOWABLE TENSION LOAD

CABLE	CAPACITY
#2 3/32 in.	175 lbs
#3 1/8 in.	320 lbs
#4 3/16 in.	630 lbs

02 NOTES

- SWAGED LOOP CABLE ASSEMBLY FOR TRAPEZES, HVAC DUCT, CABLE TRAY, PIPING, AND CONDUIT. THE LOOP ATTACHES TO STRUCTURE OR TO A SEPARATELY RATED END FIXING.
- CONNECTION TO STRUCTURE MUST BE REVIEWED BY THE STRUCTURAL ENGINEER OF RECORD.
 - PUBLISHED CAPACITIES ARE THE ICC ASSEMBLY RATING ONLY. THE ATTACHMENT TO STRUCTURE IS EVALUATED SEPARATELY PER ICC-ES PMG-1840.
 - COMPATIBLE WITH #2, #3 AND #4 SIMPLE CABLES.
 - STANDARD CABLE LENGTHS: 6', 12', 20', AND 35'. CUSTOM LENGTHS AVAILABLE UPON REQUEST.
 - CABLE MANUFACTURED IN ACCORDANCE WITH ASTM A1023 AND ASTM A931.
 - VERIFIED FOR COMPLIANCE WITH THE FOLLOWING STANDARDS BY ICC-ES: ICC-ES PMG LC 1041, MSS SP-58-2025, MSS SP-163-2025, UL 2239, ASME B31.9-2025, IAPMO PS 95-2018E3, AND SMACNA HVAC DUCT CONSTRUCTION STANDARDS.