


L23 | Football Cable Gripper

#2 and #3 cable | 100 per box

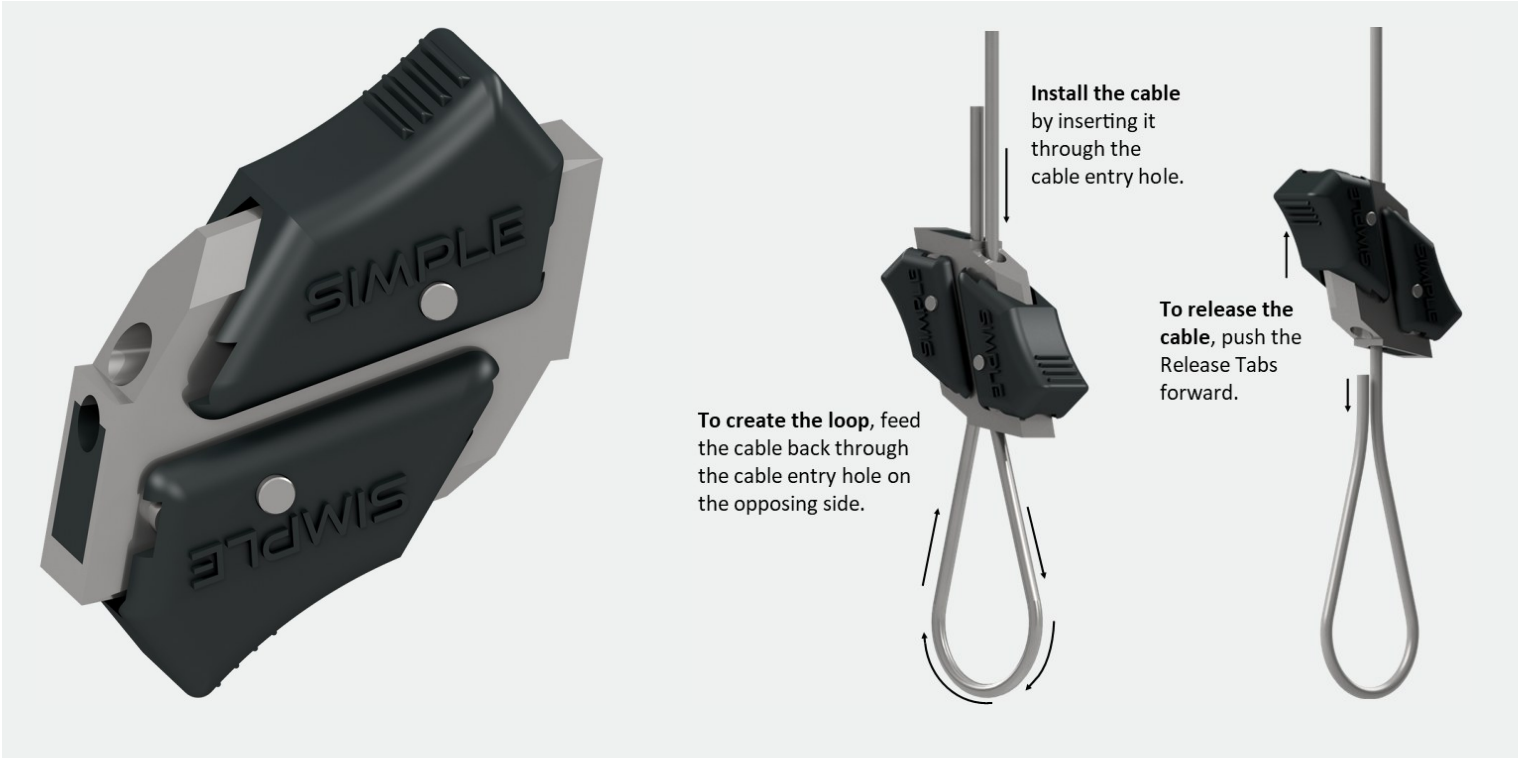

01 ALLOWABLE TENSION LOAD

CABLE	CAPACITY	ATTACHMENT
#2 3/32 in.	175 lbs	See EF (End Fixing) Details for capacities of cables and attachment to structure
#3 1/8 in.	320 lbs	See EF (End Fixing) Details for capacities of cables and attachment to structure

02 ANGLED LOAD RATINGS

CABLE	0 deg.	15 deg.	30 deg.	45 deg.	60 deg.
#2 3/32 in.	175	165	150	120	85
#3 1/8 in.	320	305	275	225	160

03 NOTES

- CABLE GRIPPING DEVICE FOR USE WITH SIMPLE CABLES ACROSS ELECTRICAL, LOW VOLTAGE, PLUMBING, PIPING, MECHANICAL AND HVAC APPLICATIONS. ENGINEERED FOR RAPID INSTALLATION AND FIELD ADJUSTMENT.
- CONNECTION TO STRUCTURE MUST BE REVIEWED BY THE STRUCTURAL ENGINEER OF RECORD.
 - COMPATIBLE WITH BOTH #2 AND #3 SIMPLE CABLES.
 - QUICK-SET MECHANISM ALLOWS IMMEDIATE LOAD TRANSFER AND ON-THE-FLY ADJUSTMENT.
 - RATED LOADS ARE FOR THE SUPPORT ASSEMBLY ONLY. THE ATTACHMENT TO STRUCTURE IS EVALUATED SEPARATELY PER ICC-ES PMG-1840.
 - ANGLED RATINGS ARE THE VERTICAL RATING REDUCED BY THE COSINE OF THE ANGLE FROM VERTICAL, PER LC1041 4.3 AND MSS SP-163. MAXIMUM 60 DEGREES.
 - VERIFIED FOR COMPLIANCE WITH THE FOLLOWING STANDARDS BY ICC-ES: ICC-ES PMG LC 1041, MSS SP-58-2025, MSS SP-163-2025, UL 2239, ASME B31.9-2025, IAPMO PS 95-2018E3, AND SMACNA HVAC DUCT CONSTRUCTION STANDARDS.