


ST383 | 3/8 in. x 3 in. Threaded Stud

SC0206ST383 - SC0335ST383 | #2 and #3 cable, 6, 12, 20 and 35 ft.

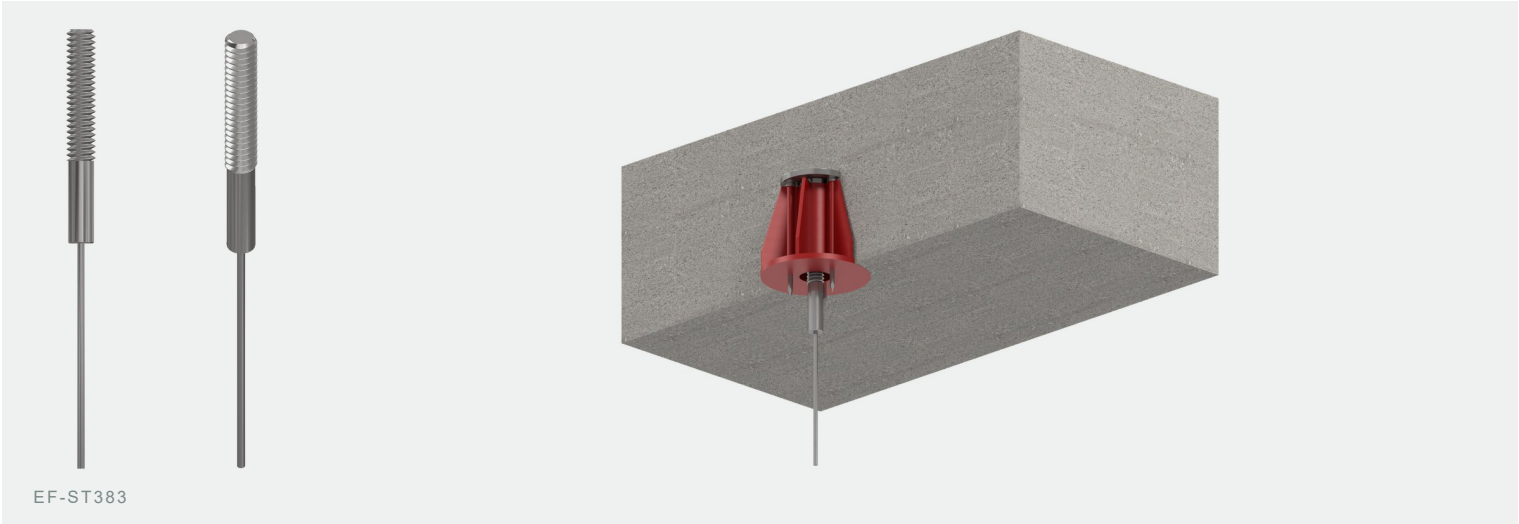

01 ALLOWABLE TENSION LOAD

CABLE	CAPACITY
#2 3/32 in.	175 lbs
#3 1/8 in.	320 lbs

02 NOTES

PRE-ENGINEERED CABLE SUPPORT ASSEMBLY WITH A 3/8 IN. X 3 IN. THREADED STUD END FIXING.

- THREADS 3/8 IN.-16. OVERALL LENGTH 2.85 IN. THREAD LENGTH 1.75 IN.
- CONNECTION TO STRUCTURE MUST BE REVIEWED BY THE STRUCTURAL ENGINEER OF RECORD.
- RATED LOADS ARE FOR THE SUPPORT ASSEMBLY ONLY. THE ATTACHMENT TO STRUCTURE IS EVALUATED SEPARATELY PER ICC-ES PMG-1840.
- STANDARD CABLE LENGTHS: 6', 12', 20', AND 35'. CUSTOM LENGTHS AVAILABLE UPON REQUEST.
- CABLE MANUFACTURED IN ACCORDANCE WITH ASTM A1023 AND ASTM A931.