


TGL | Toggle Connection

SC0206TGL - SC0235TGL | #2 cable, 6, 12, 20 and 35 ft.

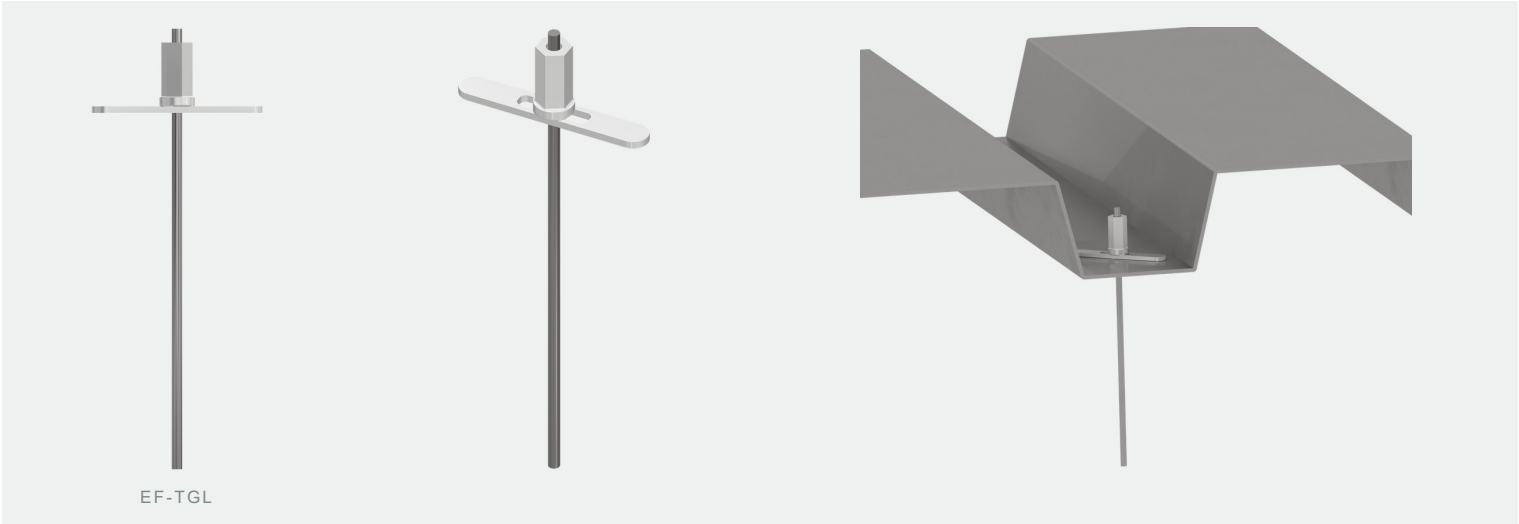

01 ALLOWABLE TENSION LOAD

CABLE	CAPACITY
#2 3/32 in.	160 lbs

02 NOTES

PRE-ENGINEERED CABLE SUPPORT ASSEMBLY WITH A TOGGLE END FIXING, FOR HOLLOW AND INACCESSIBLE STRUCTURE.

- CONNECTION TO STRUCTURE MUST BE REVIEWED BY THE STRUCTURAL ENGINEER OF RECORD.
- FOR #2 SIMPLE CABLE.
- RATED LOADS ARE FOR THE SUPPORT ASSEMBLY ONLY. THE ATTACHMENT TO STRUCTURE IS EVALUATED SEPARATELY PER ICC-ES PMG-1840.
- THE TOGGLE REQUIRES A 5/16 IN. PILOT HOLE AND ADEQUATE CLEARANCE BEHIND THE STRUCTURE.
- STANDARD CABLE LENGTHS: 6', 12', 20', AND 35'. CUSTOM LENGTHS AVAILABLE UPON REQUEST.
- CABLE MANUFACTURED IN ACCORDANCE WITH ASTM A1023 AND ASTM A931.
- VERIFIED FOR COMPLIANCE WITH THE FOLLOWING STANDARDS BY ICC-ES: ICC-ES PMG LC 1041, MSS SP-58-2025, MSS SP-163-2025, UL 2239, ASME B31.9-2025, IAPMO PS 95-2018E3, AND SMACNA HVAC DUCT CONSTRUCTION STANDARDS.