


YASS | Y-Assembly, Snaphook

SC0206YASS18 - SC0220YASS18 | #2 cable, 18 in. snaphooks

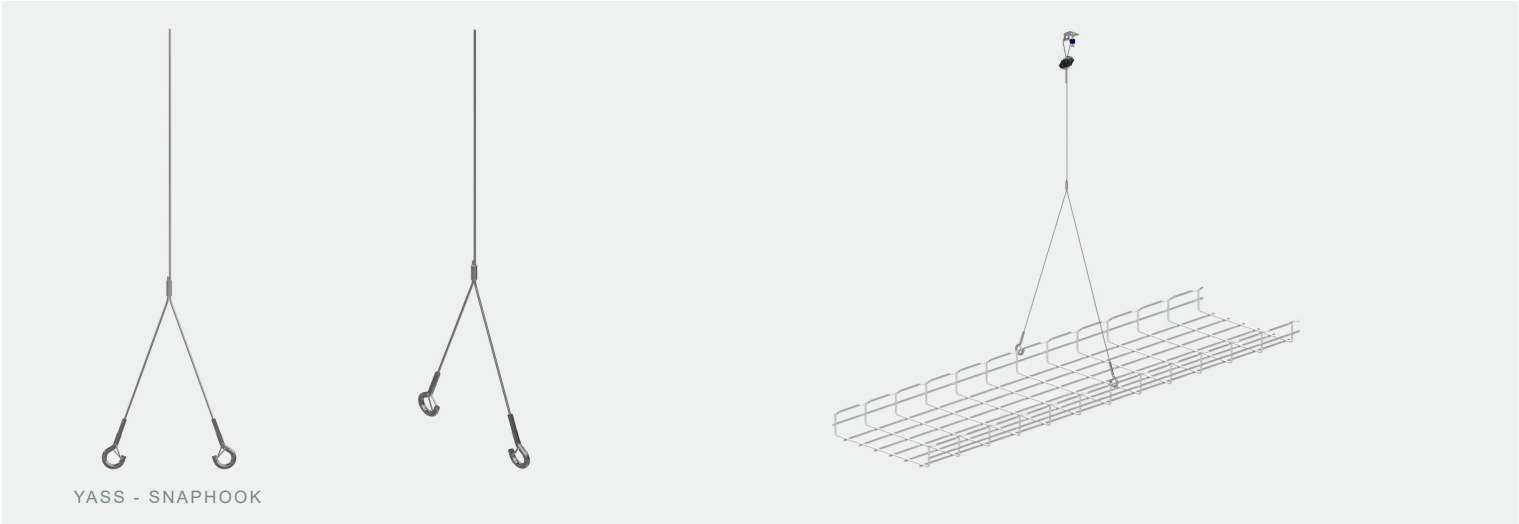

01 ALLOWABLE TENSION LOAD

CABLE	CAPACITY
#2 3/32 in.	175 lbs

02 NOTES

Y-ASSEMBLY WITH TWO SNAPHOOK LEGS FOR SUPPORTING FROM TWO POINTS.

- CONNECTION TO STRUCTURE MUST BE REVIEWED BY THE STRUCTURAL ENGINEER OF RECORD.
- FOR #2 SIMPLE CABLE.
- RATED LOADS ARE FOR THE SUPPORT ASSEMBLY ONLY. THE ATTACHMENT TO STRUCTURE IS EVALUATED SEPARATELY PER ICC-ES PMG-1840.
- CABLE MANUFACTURED IN ACCORDANCE WITH ASTM A1023 AND ASTM A931.
- VERIFIED FOR COMPLIANCE WITH THE FOLLOWING STANDARDS BY ICC-ES: ICC-ES PMG LC 1041, MSS SP-58-2025, MSS SP-163-2025, UL 2239, ASME B31.9-2025, IAPMO PS 95-2018E3, AND SMACNA HVAC DUCT CONSTRUCTION STANDARDS.