


# YACS | Y-Accessory, Snaphook

SC02YACS06 - SC02YACS18 | #2 cable, 6, 12 and 18 in.

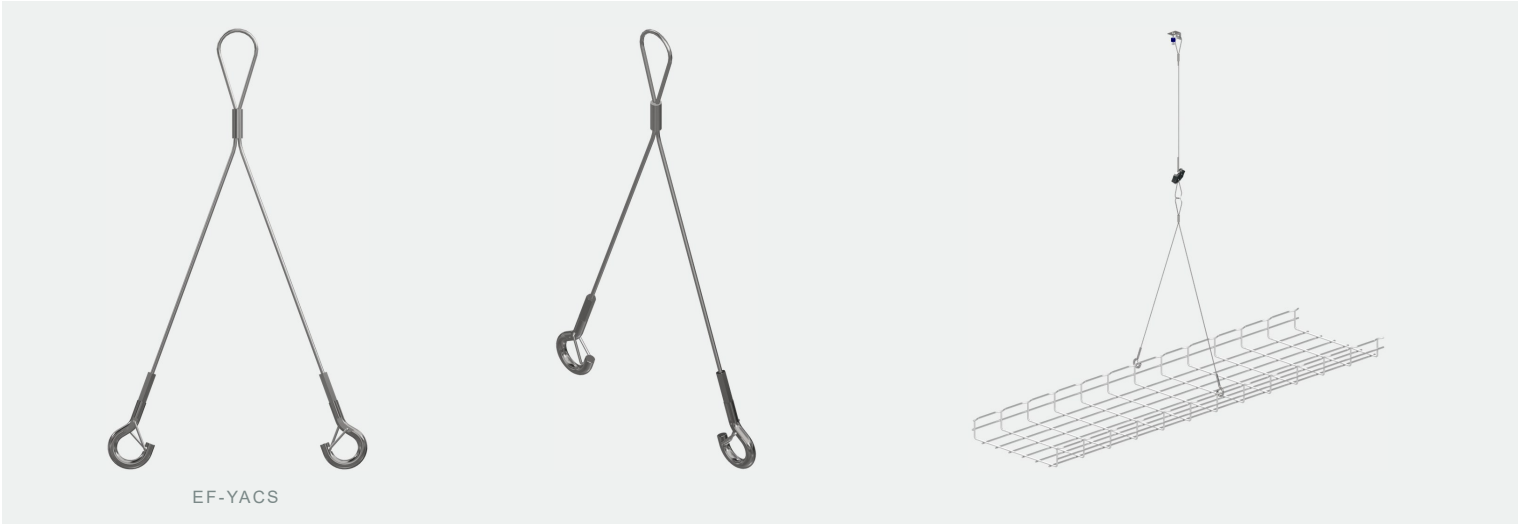

## 01 ALLOWABLE TENSION LOAD

| CABLE       | CAPACITY |
|-------------|----------|
| #2 3/32 in. | 175 lbs  |

## 02 NOTES

Y-ACCESSORY FOR BRANCHING A SIMPLE CABLE SUPPORT INTO TWO LEGS.

- CONNECTION TO STRUCTURE MUST BE REVIEWED BY THE STRUCTURAL ENGINEER OF RECORD.
- FOR #2 SIMPLE CABLE.
- RATED LOADS ARE FOR THE SUPPORT ASSEMBLY ONLY. THE ATTACHMENT TO STRUCTURE IS EVALUATED SEPARATELY PER ICC-ES PMG-1840.
- CABLE MANUFACTURED IN ACCORDANCE WITH ASTM A1023 AND ASTM A931.
- VERIFIED FOR COMPLIANCE WITH THE FOLLOWING STANDARDS BY ICC-ES: ICC-ES PMG LC 1041, MSS SP-58-2025, MSS SP-163-2025, UL 2239, ASME B31.9-2025, IAPMO PS 95-2018E3, AND SMACNA HVAC DUCT CONSTRUCTION STANDARDS.